

US008951286B2

## (12) United States Patent

Sugimoto et al.

(10) Patent No.:

US 8,951,286 B2

(45) **Date of Patent:** 

Feb. 10, 2015

### (54) TISSUE ANCHOR AND ANCHORING SYSTEM

(75) Inventors: **Hiroatsu Sugimoto**, Cambridge, MA (US); **Aaron M. Call**, Lowell, MA (US);

Karl R. Leinsing, Hampton, NH (US)

(73) Assignee: Mitralign, Inc., Tewksbury, MA (US)

(\*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 12/273,670

(22) Filed: Nov. 19, 2008

(65) **Prior Publication Data** 

US 2009/0076547 A1 Mar. 19, 2009

### Related U.S. Application Data

(62) Division of application No. 11/174,951, filed on Jul. 5, 2005.

(51) Int. Cl. *A61B 17/04* 

(2006.01)

 $A61B\ 17/00$  (2006.01)

(52) U.S. Cl.

CPC ....... *A61B 17/0401* (2013.01); *A61B 17/00234* (2013.01); *A61B 17/0487* (2013.01); *A61B 2017/00243* (2013.01); *A61B 2017/0417* (2013.01); *A61B 2017/0419* (2013.01); *A61B 2017/0458* (2013.01); *A61B 2017/0464* (2013.01); *A61B 2017/048* (2013.01);

(58) Field of Classification Search

CPC ....... A61B 17/0401; A61B 17/0487; A61B 2017/00243; A61B 2017/0496

### (56) References Cited

### U.S. PATENT DOCUMENTS

2,143,910 A	1/1939	Didusch
3,674,014 A	7/1972	Tillander
3,794,041 A	2/1974	Frei et al.
3,841,521 A	10/1974	Jarvik
3,959,960 A	6/1976	Santos
3,986,493 A	10/1976	Hendren, III
3,995,619 A	12/1976	Glatzer
4,042,979 A	8/1977	Angell
4,055,861 A	11/1977	Carpentier et al.
4,258,705 A	3/1981	Sorensen et al.
	(0	

### (Continued)

### FOREIGN PATENT DOCUMENTS

EP 1016377 A2 7/2000 EP 2181670 5/2010

(Continued)

### OTHER PUBLICATIONS

U.S. Patent and Trademark Office, Office Action in U.S. Appl. No. 10/949,412, Aug. 6, 2008.


(Continued)

Primary Examiner — Gregory Anderson (74) Attorney, Agent, or Firm — Leason Ellis LLP

### (57) ABSTRACT

A tissue anchor includes an anchor member formed from a generally flexible material. An activation member, which may be a tensioning member, causes proximal and distal end portions of the anchor member to move toward each other into a shortened configuration suitable for anchoring against the tissue. The tissue anchor can optionally be deployed and activated using a catheter device.

### 57 Claims, 15 Drawing Sheets

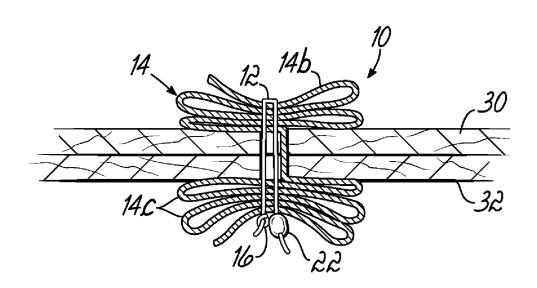

# US 8,951,286 B2 Page 2

(56)	Referen	ices Cited	6,113,611 A		Allen et al.
U.S	S. PATENT	DOCUMENTS	6,126,647 A RE36,974 E	11/2000	
4 2 6 0 7 9 7 . 4	1/1002	Towns at al	6,159,234 A 6,162,168 A		Bonutti et al. Schweich, Jr. et al.
4,369,787 A 4,489,446 A	1/1983	Lasner et al. Reed	6,165,119 A	12/2000	Schweich, Jr. et al.
4,532,926 A	8/1985	O'Holla	6,165,120 A		Schweich, Jr. et al.
4,809,713 A		Grayzel	6,165,183 A 6,173,199 B1		Kuehn et al. Gabriel
4,917,698 A 4,945,912 A		Carpentier et al. Langberg	6,190,353 B1		Makower et al.
5,016,353 A	5/1991		6,197,017 B1	3/2001	Brock et al.
5,041,129 A	8/1991	Hayhurst et al.	6,206,895 B1		Levinson Solem et al.
5,041,130 A		Cosgrove et al.	6,210,432 B1 6,231,587 B1		Makower
5,061,277 A 5,104,407 A		Carpentier et al. Lam et al.	6,267,781 B1	7/2001	
5,123,914 A	6/1992	Cope	6,269,819 B1		Oz et al.
5,171,232 A		Castillo et al.	6,285,903 B1 6,287,317 B1		Rosenthal et al. Makower et al.
5,171,259 A 5,192,302 A	12/1992 3/1993	Kensey et al.	6,298,257 B1		Hall et al.
5,201,880 A		Wright et al.	6,306,133 B1	10/2001	
5,203,777 A	4/1993		6,312,447 B1 6,319,263 B1	11/2001	Grimes Levinson
5,304,190 A 5,306,234 A	4/1994 4/1994	Reckelhoff et al. Johnson	6,332,089 B1		Acker et al.
5,306,296 A		Wright et al.	6,332,893 B1		Mortier et al.
5,337,736 A	8/1994	Reddy	6,352,543 B1	3/2002	Cole Hall et al.
5,360,444 A		Kusuhara Wortrich	6,385,472 B1 6,401,720 B1		Stevens et al.
5,364,365 A 5,364,393 A		Auth et al.	6,402,680 B2	6/2002	Mortier et al.
5,429,131 A		Scheinman et al.	6,402,781 B1		Langberg et al.
5,450,860 A		O'Connor	6,406,420 B1 6,447,522 B2		McCarthy et al. Gambale et al.
5,452,513 A 5,464,023 A	9/1995	Zinnbauer et al. Viera	6,461,366 B1	10/2002	
5,545,178 A	* 8/1996	Kensey et al 606/213	6,500,184 B1		Chan et al.
5,565,122 A		Zinnbauer et al.	6,524,303 B1 6,530,952 B2	3/2003	Garibaldi Vecely
5,571,215 A 5,593,424 A		Sterman et al. Northrup	6,537,198 B1		Vidlund et al.
5,607,471 A		Seguin et al.	6,537,314 B2	3/2003	Langberg et al.
5,623,943 A	4/1997	Hackett et al.	6,542,766 B2 6,544,230 B1		Hall et al. Flaherty et al.
5,626,590 A 5,640,955 A	5/1997	Wilk Ockuly et al.	6,554,852 B1		Oberlander
5,669,919 A		Sanders et al.	6,562,019 B1	5/2003	Sell
5,674,279 A	10/1997	Wright et al.	6,565,562 B1		Shah et al.
5,682,906 A		Sterman et al. Cope et al.	6,589,208 B2 6,594,517 B1	7/2003	Ewers et al. Nevo
5,690,656 A 5,706,827 A		Ehr et al.	6,596,014 B2	7/2003	Levinson et al.
5,716,367 A	2/1998	Koike et al.	6,619,291 B2		Hlavka et al.
5,716,397 A	2/1998		6,626,899 B2 6,626,919 B1		Houser et al. Swanstrom
5,716,399 A 5,776,080 A	2/1998 7/1998	Thome et al.	6,626,930 B1		Allen et al.
5,776,189 A	7/1998	Khalid	6,629,534 B1	10/2003	
5,797,939 A	8/1998		6,629,921 B1 6,655,386 B1	10/2003 12/2003	Schweich, Jr. et al. Makower et al.
5,813,996 A 5,824,066 A	10/1998	St. Germain et al. Gross	6,656,221 B2		Taylor et al.
5,827,300 A	10/1998		6,669,687 B1	12/2003	
5,829,447 A	11/1998	Stevens et al.	6,669,707 B1 6,676,702 B2	12/2003 1/2004	Swanstrom et al.
5,830,224 A 5,851,185 A	11/1998	Cohn et al.	6,689,164 B1	2/2004	
5,860,920 A		McGee et al.	6,699,263 B2	3/2004	
5,868,733 A		Ockuly et al.	6,702,825 B2 6,702,826 B2		Frazier et al. Liddicoat et al.
5,879,366 A 5,888,240 A		Shaw et al 606/213 Carpentier et al.	6,718,985 B2		Hlavka et al.
5,906,579 A	5/1999	Vander Salm et al.	6,723,038 B1	4/2004	Schroeder et al.
5,911,720 A	6/1999	Bourne et al.	6,730,112 B2		Levinson Nobles et al.
5,928,224 A 5,931,818 A		Laufer Werp et al.	6,733,509 B2 6,736,808 B1		Motamedi et al.
5,944,738 A		Amplatz et al.	6,746,472 B2	6/2004	Frazier et al.
5,967,984 A	10/1999	Chu et al.	6,764,500 B1		Muijs Van De Moer et al.
5,980,515 A	11/1999		6,769,434 B2 6,793,618 B2		Liddicoat et al. Schweich, Jr. et al.
5,984,939 A 6,015,414 A	11/1999 1/2000	Werp et al.	6,866,673 B2		Oren et al.
6,027,514 A	2/2000	Stine et al.	6,913,608 B2		Liddicoat et al.
6,042,581 A		Ryan et al.	6,921,407 B2		Nguyen et al.
6,050,472 A 6,050,936 A		Shibata Schweich, Jr. et al.	6,923,823 B1 6,942,694 B2		Bartlett et al. Liddicoat et al.
6,068,637 A		Popov et al.	6,945,978 B1	9/2005	
6,068,648 A	5/2000	Cole et al.	6,964,674 B1	11/2005	Matsuura et al.
6,071,292 A		Makower et al.	6,964,683 B2		Kowalsky et al.
6,099,460 A 6,102,945 A	8/2000	Denker Campbell	6,976,995 B2 7,004,958 B2		Mathis et al. Adams et al.
0,102,943 A	o/2000	Campoen	7,00 <del>4</del> ,230 D2	2/2000	A KIGHIB CL dl.

### US 8,951,286 B2

Page 3


(56)	Referen	nces Cited	2004/0127983			Mortier et al.
ПЗ	PATENT	DOCUMENTS	2004/0133063 2004/0147958			McCarthy et al. Lam et al.
0.0	. 171111111	DOCOMENTS	2004/0152947	A1 8/	2004	Schroeder et al.
7,037,334 B1	5/2006	Hlavka et al.	2004/0162568			Saadat et al.
7,101,395 B2		Tremulis et al.	2004/0167539 2004/0167620			Kuehn et al. Ortiz et al.
7,115,110 B2		Frazier et al.	2004/0172046			Hlavka et al.
7,166,127 B2 7,211,094 B2	1/2007	Spence et al. Gannoe et	2004/0172040			Roue et al.
7,247,134 B2		Vidlund et al.	2004/0186566			Hindrichs et al.
7,731,732 B2	6/2010		2004/0193191			Starksen et al.
7,749,250 B2		Stone et al.	2004/0220473 2004/0236419		2004 2004	Lualdi Mila
7,771,455 B2	8/2010		2004/0230419			Liddicoat et al.
7,883,538 B2 7,931,580 B2		To et al. Gertner et al.	2004/0243227			Starksen et al.
8,172,871 B2	5/2012		2004/0260317			Bloom et al.
2001/0005787 A1	6/2001	Oz et al.	2005/0033446			Deem et al.
2001/0039436 A1		Frazier et al.	2005/0049634 2005/0049681			Chopra Greenhalgh et al.
2001/0049492 A1 2002/0013571 A1		Frazier et al. Goldfarb et al.	2005/0045081			Starksen
2002/0015571 A1 2002/0016628 A1		Langberg et al.	2005/0055089	A1 3/	2005	Macoviak et al.
2002/0019649 A1		Sikora et al.	2005/0065550			Starksen et al.
2002/0026198 A1		Ockuly et al.	2005/0065601 2005/0075723			Lee et al. Schroeder et al.
2002/0026216 A1		Grimes	2005/0075725			Morales et al.
2002/0029080 A1 2002/0042621 A1		Mortier et al. Liddicoat et al.	2005/0107812			Starksen et al.
2002/0072758 A1		Reo et al.	2005/0107871			Realyvasquez et al.
2002/0087169 A1		Brock et al.	2005/0119523		2005	
2002/0087173 A1		Alferness et al.	2005/0119734		2005	Spence et al.
2002/0087178 A1		Nobles et al.	2005/0119735 2005/0125011		2005	Spence et al. Spence et al.
2002/0095167 A1 2002/0100485 A1		Liddicoat et al. Stevens et al.	2005/0123011			Cohn
2002/0100483 AT 2002/0103532 AT		Langberg et al.	2005/0143811			Realyvasquez
2002/0107531 A1		Schreck et al.	2005/0148815			Mortier et al.
2002/0128708 A1		Northrup, III et al.	2005/0149014			Hauck et al.
2002/0156526 A1		Hlavka et al.	2005/0159810 2005/0177228			Filsoufi Solem et al.
2002/0165535 A1 2002/0169359 A1		Lesh et al. McCarthy et al.	2005/0177223			Hlavka et al.
2002/0169502 A1		Mathis	2005/0197693	A1 9/	2005	Pai et al.
2002/0169504 A1		Alferness et al.	2005/0216039			Lederman
2002/0173841 A1		Ortiz et al.	2005/0234481			Waller
2002/0183766 A1	12/2002		2005/0251157 2005/0251159			Saadat et al. Ewers et al.
2002/0183836 A1 2002/0183837 A1		Liddicoat et al. Streeter et al.	2005/0251202			Ewers et al.
2002/0183838 A1		Liddicoat et al.	2005/0251205			Ewers et al.
2002/0183841 A1		Cohn et al.	2005/0251206			Maahs et al.
2002/0188170 A1		Santamore et al.	2005/0251207 2005/0251208			Flores et al 606/232
2003/0018358 A1 2003/0069593 A1	1/2003	Saadat Tremulis et al.	2005/0251208			
2003/0069636 A1		Solem et al.	2005/0251210			Westra et al.
2003/0078465 A1		Pai et al.	2005/0267533			Gertner
2003/0078654 A1		Taylor et al.	2005/0267571		2005	Spence et al. Torrie et al.
2003/0078671 A1		Lesniak et al.	2005/0283192 2005/0288694			Solomon
2003/0083538 A1 2003/0105474 A1		Adams et al. Bonutti	2006/0004410			Nobis et al.
2003/0105574 A1		Alferness et al.	2006/0009784			Behl et al.
2003/0120340 A1		Liska et al.	2006/0069429			Spence et al.
2003/0130730 A1		Cohn et al.	2006/0142756 2006/0161040			Davies et al. McCarthy et al.
2003/0144697 A1 2003/0160721 A1		Mathis et al. Gilboa et al.	2006/0178682			Boehlke
2003/0100721 A1 2003/0171776 A1		Adams et al.	2006/0212045		2006	Schilling et al.
2003/0171806 A1		Mathis et al.	2007/0010857			Sugimoto et al.
2003/0199974 A1		Lee et al.	2007/0055303			Vidlund et al.
2003/0204205 A1		Sauer et al.	2007/0080188 2007/0106310			Spence et al. Goldin et al.
2003/0208195 A1 2003/0212453 A1		Thompson et al. Mathis et al.	2007/0112424		2007	
2003/0212433 A1 2003/0220685 A1		Hlvka et al.	2008/0228165	A1 9/	2008	Spence et al.
2003/0233142 A1	12/2003	Morales et al.	2008/0228198			Traynor et al.
2004/0003819 A1		St. Goar et al.	2008/0228265		2008	Spence et al. McNamara et al.
2004/0019378 A1		Hlavka et al.	2008/0228266 2008/0228267			McNamara et al.  Spence et al.
2004/0024414 A1 2004/0030382 A1		Downing St. Goar et al.	2008/0275503			Spence et al.
2004/0030382 AT 2004/0039442 AT		St. Goar et al. St. Goar et al.	2009/0018655			Brunelle et al.
2004/0044364 A1		DeVries et al.				
2004/0049211 A1		Tremulis et al.	FO	REIGN F	PATE	NT DOCUMENTS
2004/0092962 A1		Thornton et al.				
2004/0093023 A1		Allen et al.	WO	9604852		2/1996
2004/0097865 A1 2004/0122456 A1	5/2004 6/2004	Anderson et al. Saadat et al.	WO WO	9900059 0003759		1/1999 1/2000
2007/0122930 AT	0/2004	Saariat Ct at.	WO	0003139	- A2	1,2000


(56)	References Cited
	FOREIGN PATENT DOCUMENTS
WO WO WO WO WO WO WO WO	0044311 A2 8/2000 0060995 A2 10/2000 0067640 A2 11/2000 0200099 A2 1/2002 02051329 A1 7/2002 02096275 A2 12/2002 03001893 A2 1/2003 03007796 A2 1/2003 03053289 A1 7/2003 WO 2004/037317 5/2004
WO WO WO WO WO WO WO WO	2004045378 A2 6/2004 2004112658 A1 12/2004 2005011463 A2 2/2005 2005013832 A1 2/2005 2005025644 A2 3/2005 WO 2005058239 6/2005 2006064490 A1 6/2006 WO 2006105008 10/2006 2007005394 A1 1/2007 WO 2008091391 7/2008

### OTHER PUBLICATIONS

- U.S. Patent and Trademark Office, Office Action in U.S. Appl. No. 10/689,872, Aug. 8, 2008.
- U.S. Patent and Trademark Office, Office Action in U.S. Appl. No. 10/622,207, Apr. 11, 2008.
- U.S. Patent and Trademark Office, Office Action in U.S. Appl. No. 10/948,923, Mar. 18, 2008.
- U.S. Patent and Trademark Office, International Search Report and Written Opinion in PCT Application No. PCT/US2008/056620, Oct. 15, 2008.
- U.S. Patent and Trademark Office, International Search Report and Written Opinion in PCT Application No. PCT/US2008/080735, Dec. 17, 2008
- Cardiac Surgery Renaissance, Anatomical Landscape; Composite Profile of CABG and Valve Procedures, Apr. 25, 1996, Cardiology Roundtable Interviews.

- F. Maisano et al., The Double-Orifice Technique as a Standardized Approach to Treat Mitral Regurgitation Due to Severe Myxomatous Disease: Surgical Technique, European Journal of Cardio-thoracis Surgery, 1998.
- Douglas P. Zipes, Md et al., Ablation of Free Wall Accessory Pathways, Catheter Ablation of Arrhythmias, Chapter 8, 7 pgs., 1994.
- Gsolt L. Nagy et al., Mitral Annuloplasty with a Suture Technique, European Journal of Cardio-thoracic Surgery 18, Aug. 15, 2000, 1 pg. David L.S. Morales et al., Development of an Off Bypass Mitral Valve Repair, Department of Surgery, Columbia University, College of Physicians and Surgeons, New York, NY.
- http://www.hsforum.com/vol2/issue2/1999-4963 tables.html.
- http://www.hsforum.com/vol2/issue2/1999-4963figures.html.
- http://medtronic.com/cardiac/heartvalves/duran band/.
- European Patent Office, Supplementary Search Report in EP Application No. 02764186.9, Jan. 26, 2007.
- European Patent Office, Supplementary Search Report in EP Application No. 02733960.5, Jan. 25, 2007.
- European Patent Office, International Search Report and Written Opinion in PCT Application No. PCT/US2006/024897, Dec. 6, 2006.
- U.S. Patent and Trademark Office, Office Action in U.S. Appl. No. 10/948,922, Sep. 11, 2007.
- U.S. Patent and Trademark Office, Office Action in U.S. Appl. No. 11/111,044, Jul. 16, 2007.
- U.S. Patent and Trademark Office, Office Action in U.S. Appl. No. 10/622,207, May 21, 2007.
- U.S. Patent and Trademark Office, Office Action in U.S. Appl. No. 10/622,207, Jul. 14, 2006.
- U.S. Patent and Trademark Office, Office Action in U.S. Appl. No.
- 10/622,207, Aug. 23, 2005. U.S. Patent and Trademark Office, Office Action in U.S. Appl. No.
- 10/622,207, Dec. 28, 2004.
- European Patent Office, European Examination Report in Application Serial No. 02764186.9, Feb. 11, 2008.
- U.S. Patent and Trademark Office, Office Action in U.S. Appl. No. 11/111,044, Feb. 26, 2008.
- U.S. Patent and Trademark Office, Office Action in U.S. Appl. No. 10/949,133, Dec. 10, 2008.
- \* cited by examiner

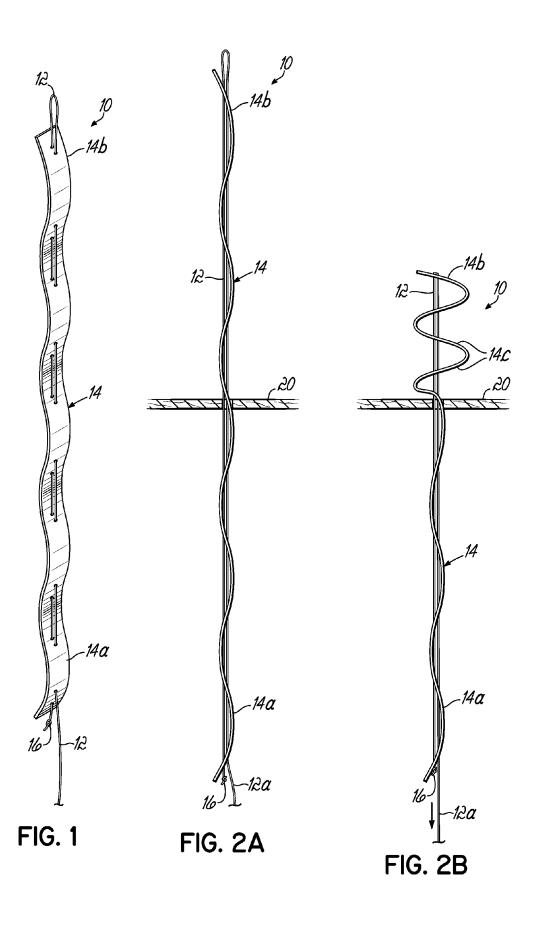

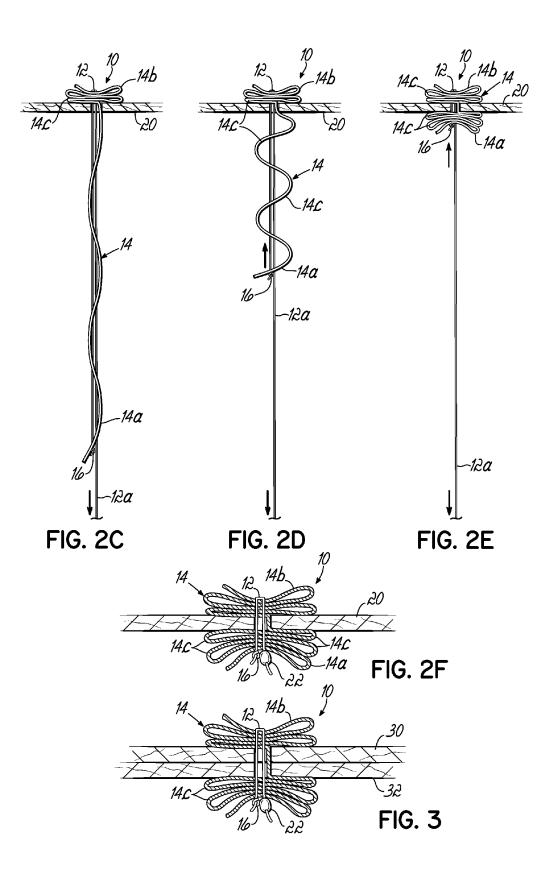





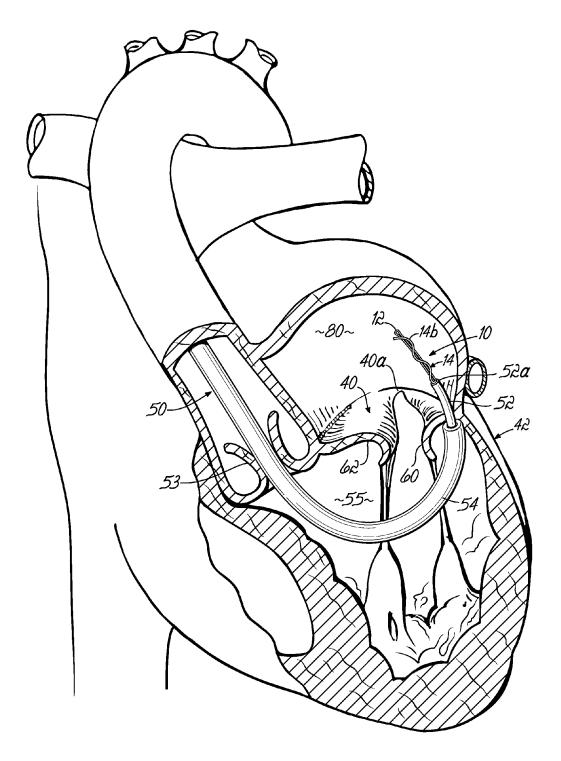



FIG. 4A

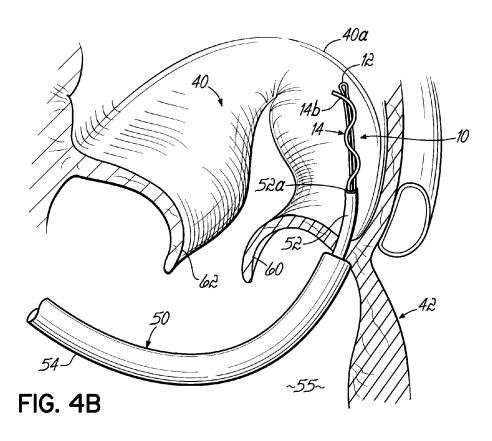


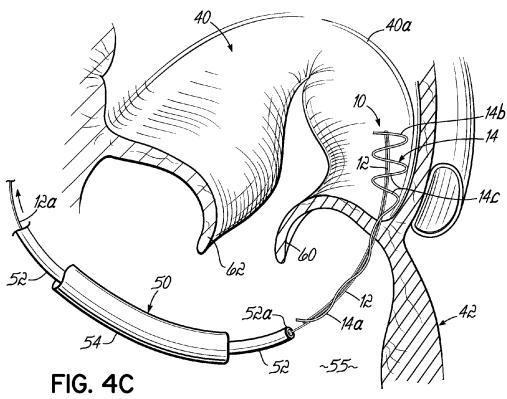


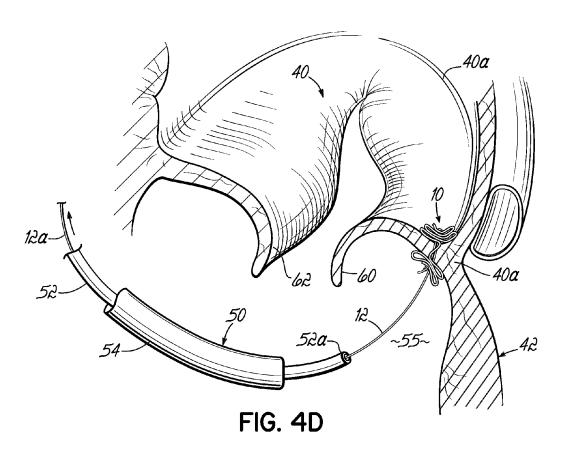


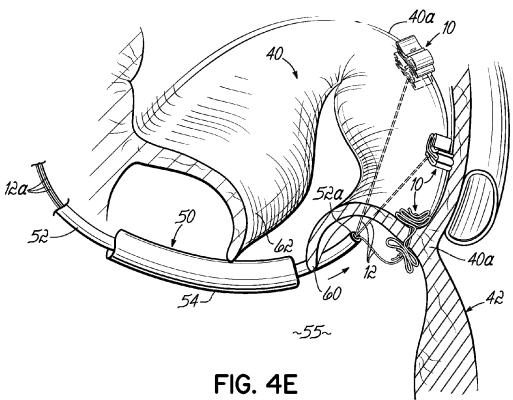


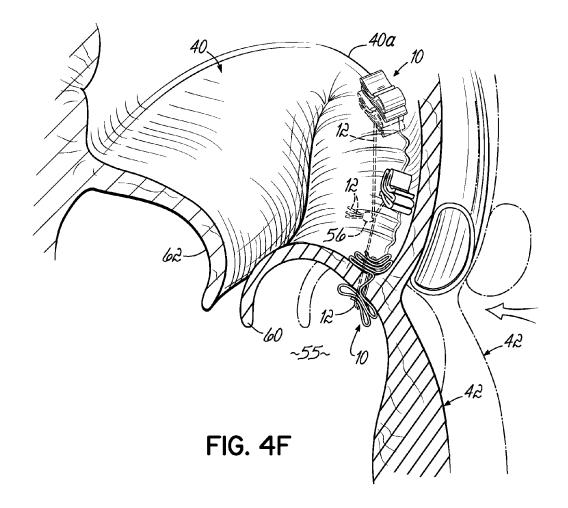


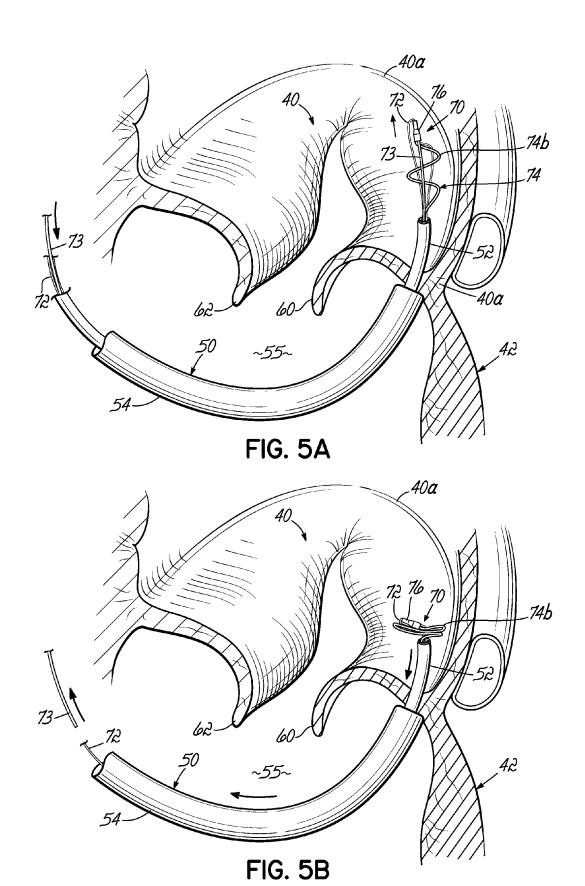


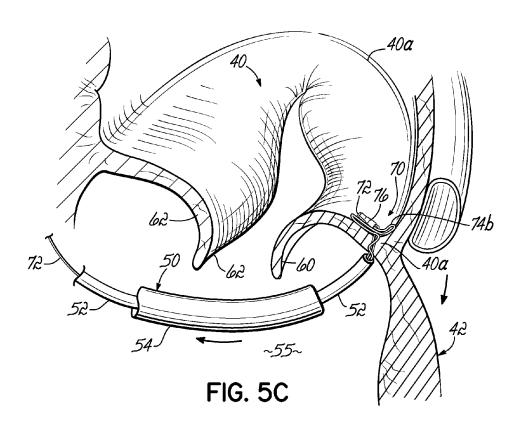


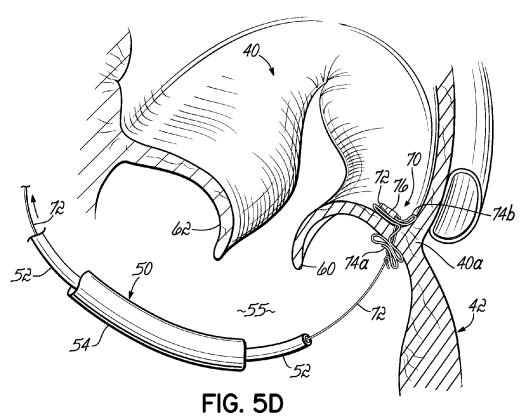


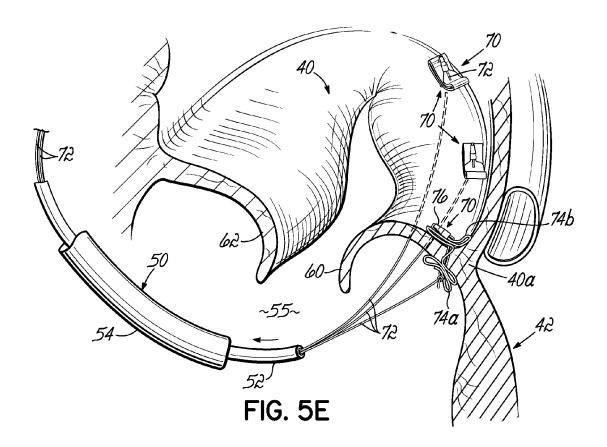


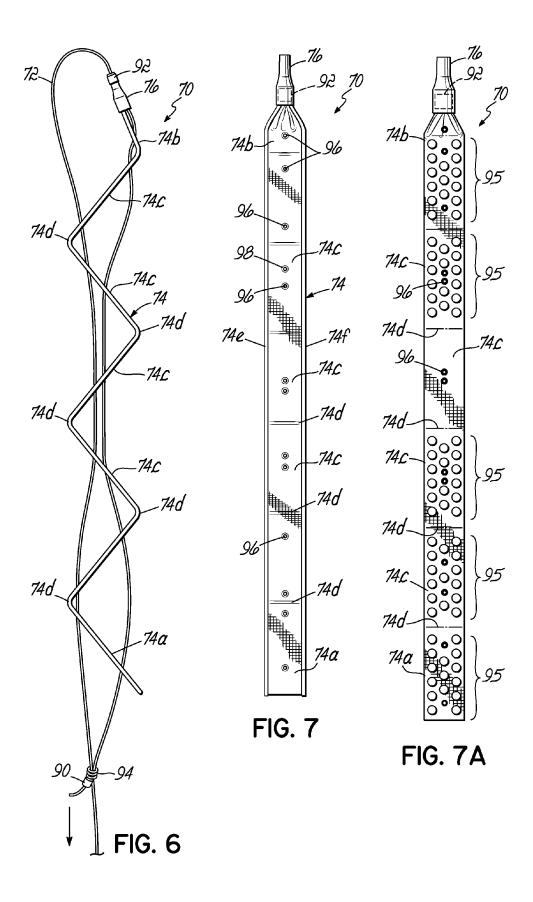


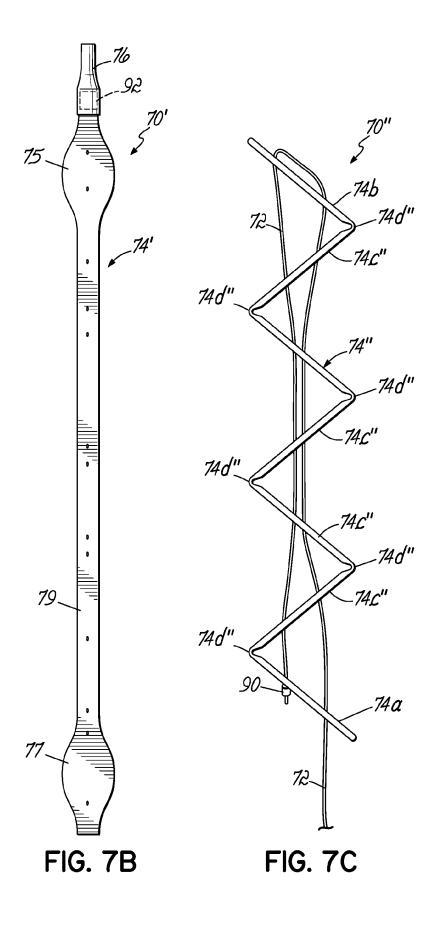


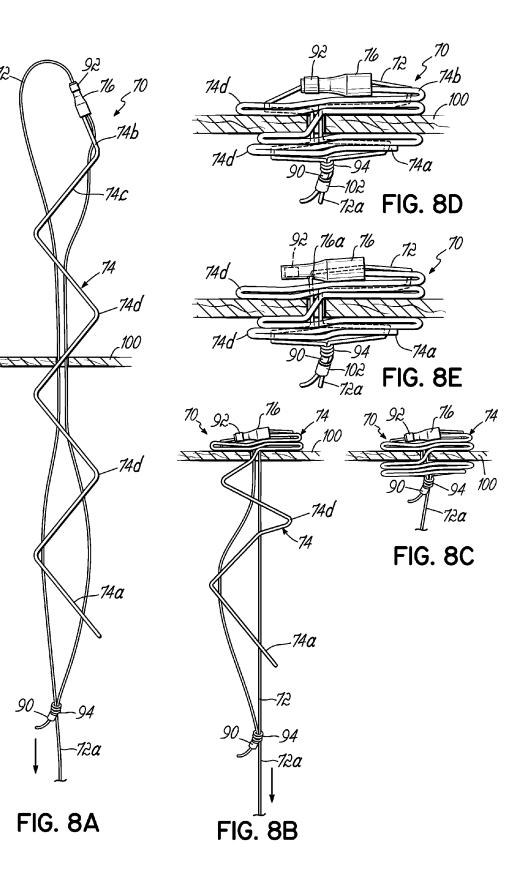

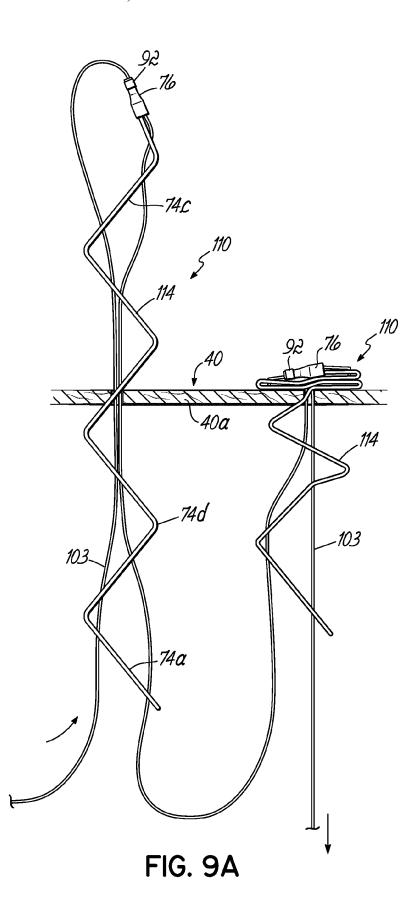

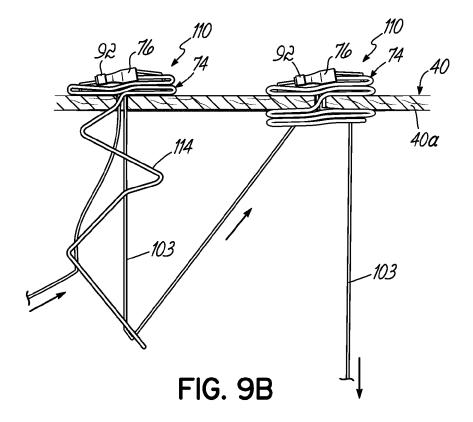

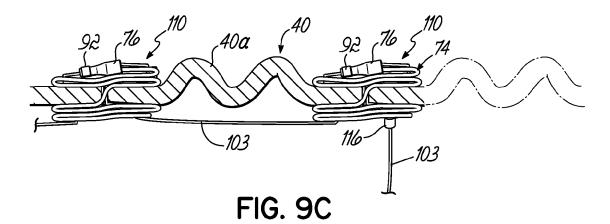

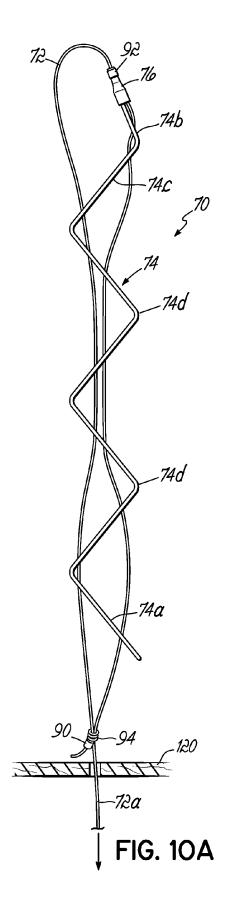

Feb. 10, 2015




FIG. 10B

### TISSUE ANCHOR AND ANCHORING SYSTEM

This application is a divisional of U.S. patent application Ser. No. 11/174,951, filed Jul. 5, 2005 (pending), the disclosure of which is hereby incorporated by reference herein.

### TECHNICAL FIELD

The present invention generally relates to tissue anchors and, more particularly, anchors and methods of using such anchors to secure an element or otherwise provide an anchor point to biological tissue and/or to secure at least two tissue portions together.

#### BACKGROUND

Many different surgical procedures require that an anchor be used to either establish a strong point of connection for other securing elements or devices relative to a tissue location 20 in a patient, and/or to secure two or more tissue layers (i.e., portions together. In this regard, the term "anchor", as used herein, is not to be limited to any particular type of tissue fastening or securement application but, rather, encompasses any hard and/or soft tissue-to-tissue securement, tissue-to-device securement, or any other tissue securement application

One particular area that has received attention in recent years is that of catheter-based surgical procedures. Various tissue anchors have been developed for purposes of deployment and securement with catheter-based technology. However, there are still limitations in current technology. For example, insertion size versus deployment size must be strictly controlled due to the need for catheter diameters to be maintained relatively small. Many catheter-based tissue anchor systems have very specialized uses and are not versatile for use in many different tissue fastening or securement operations.

There is generally a need for a simpler, more versatile tissue anchor which may be deployed and securely fastened to 40 tissue in a catheter-based operation or a non-catheter-based operation.

### **SUMMARY**

In one aspect, the invention provides a tissue anchor comprising a generally flexible anchor member capable of being inserted through tissue and moving between an elongate configuration and a shortened configuration suitable for anchoring against at least one side of the tissue. The anchor member 50 includes a proximal end portion, a distal end portion, and a compressible intermediate portion between the proximal end portion and the distal end portion. A tensioning member is operatively connected to the anchor member such that the anchor member can slide relative to the tensioning member. 55 The tensioning member may be pulled to cause the anchor member to move relative to the tensioning member from the elongate configuration to the shortened configuration. In the shortened configuration, the compressible intermediate portion of the anchor member can compress or shorten and 60 thereby adjust to the thickness of the tissue between the proximal and distal end portions.

In another aspect of the invention, a tissue anchor is provided comprising a flat, generally flexible anchor member capable of movement between an elongate configuration suitable for deployment and a shortened configuration suitable for anchoring against tissue. A tensioning member is opera-

2

tively connected to the anchor member such that the anchor member can slide relative to the tensioning member. The tensioning member is capable of being pulled to cause the anchor member to move relative to the tensioning member from the elongate configuration to the shortened configuration

In a further aspect of the invention, a tissue anchor is provided comprising a flat anchor member formed from a strip of fabric material and capable of movement between an elongate configuration suitable for deployment and a shortened configuration suitable for anchoring against tissue. A tensioning member is operatively connected to the anchor member such that the anchor member can slide relative to the tensioning member. The tensioning member is capable of being pulled to cause the anchor member to move relative to the tensioning member from the elongate configuration to the shortened configuration. A lock member is provided for securing the anchor member in the shortened configuration.

In a further aspect of the invention, a tissue anchor is provided comprising a flat, generally flexible anchor member capable of being inserted through tissue and moving between an elongate configuration suitable for deployment through a catheter and a shortened configuration suitable for anchoring against the tissue. A tensioning member is operatively connected to the anchor member such that the anchor member may slide relative to the tensioning member. The tensioning member is capable of being pulled to cause the anchor member to move relative to the tensioning member from the elongate configuration to the shortened configuration against the tissue.

In another aspect of the invention, a tissue anchor is provided comprising a flat elongate strip formed from a generally flexible material and having proximal and distal end portions. A tensioning member having first and second ends is operatively connected to the elongate strip such that pulling on the first end of the tensioning member causes the proximal and distal end portions of the elongate strip to move toward each other to a shortened configuration suitable for anchoring against the tissue.

In certain aspects, the anchor member is advantageously formed as a flat, generally flexible strip of material, while in other aspects it need not be a flat strip but may have other shapes, such as tubular, that may or may not be capable of assuming a flat shape. Various optional features may be incorporated into any or all of the various embodiments of the tissue anchor. For example, the tissue anchor may be formed from a material selected from at least one of: natural fibers. synthetic fibers, polymers, and metals. Such materials may be absorbable or nonabsorbable, and may be radiopaque or at least partially radiopaque. The tensioning member may further comprise a suture, or any other suitable flexible, semirigid or rigid tensioning member. The tensioning member may include a stop member engaged with the anchor member, such as a knot in the tensioning member, or a separate stop member (e.g., a crimp) engageable with the anchor member. The tensioning member may, for example, extend through the anchor member at multiple locations between the proximal end portion and the distal end portion. Such coupling of the tensioning member and the anchor member may be configured in many different manners depending, for example, on the desired configuration of the anchor member upon pulling the tensioning member and moving the anchor member into the shortened configuration. In one embodiment, at least one fold is formed upon pulling the tensioning member. Multiple folds may be formed in a generally zig-zag or accordion fashion. A lock member may be provided and engageable with the tensioning member to retain the anchor member in

the shortened configuration. The tissue anchor may include at least one radiopaque marker on one or both of the anchor member and the tensioning member. For example, a first radiopaque marker may be located near the proximal end portion when the anchor member is in the shortened configuration and a second radiopaque marker may be located near the distal end portion when the anchor member is in the shortened configuration. The distal end portion of the anchor member may include a relatively more rigid tip as compared to the anchor member and having a reduced width as com- 10 pared to an adjacent portion of the anchor member. The anchor member itself may be designed in any of numerous manners, including designs that have a uniform width along the length thereof, and designs that have a varying width along the length. Other features may be incorporated such as 15 edge portions that are slightly more rigid than a central area of the anchor member. Entire sections of the anchor member may be relatively rigid as compared to fold line portions thereof while still resulting in a generally flexible anchor member. As necessary, hinge portions, such as living hinges, 20 may be designed into the anchor member to allow for folding or other shortening action of the anchor member. While a tensioning member is specifically disclosed herein for activation purposes (that is, activating the anchor member from the elongate configuration to the shortened configuration), 25 the invention in various combinations may utilize other types of activation, such as compressive activation.

Each of the embodiments of the tissue anchor may be part of a catheter-based anchoring system having a delivery catheter and a suitable deploying device associated with the delivery catheter and operable to extend the anchor member from the delivery catheter. The deploying device may further comprise a deploying catheter at least partially containing the anchor member and at least partially contained within the delivery catheter.

The invention further provides for various methods of anchoring tissue as generally described herein. For example, in one aspect a method of anchoring tissue is provided comprising inserting a generally flexible elongate anchor member through the tissue, and pulling a first end of a tensioning 40 member coupled for sliding movement relative to the first anchor member to draw the proximal and distal end portions toward each other and to compress the intermediate portion into the shortened configuration with at least one of the proximal and distal end portions engaged against the tissue.

In another aspect of the invention, a method of tissue anchoring is provided comprising inserting the generally flexible flat elongate strip having proximal and distal end portions through the tissue, and pulling a first end of a tensioning member operatively connected to the strip to draw the proximal and distal end portions of the strip toward each other into the shortened configuration engaged against the tissue.

In another aspect, a method of tissue anchoring is provided comprising inserting the generally flexible flat elongate strip having proximal and distal end portions through the tissue, 55 and pulling a first end of a tensioning member operatively connected to the strip to configure at least a portion of the strip into a shortened configuration engaged against the tissue.

In each of the embodiments engagement of the anchor member against the tissue may be engagement against opposite sides of at least one tissue layer, or engagement against only one side of at least one tissue layer.

Additional features and advantages of the invention will become readily apparent to those of ordinary skill in the art upon review of the following detailed description of the illustrative embodiments taken in conjunction with the accompanying illustrative figures.

4

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a tissue anchor constructed in accordance with a first embodiment of the invention.

FIG. **2**A is a side view of the tissue anchor shown in FIG. **1**, with the tissue anchor deployed through a layer of tissue.

FIG. 2B is a side view similar to FIG. 2A, but illustrating the distal portion of the tissue anchor being moved toward the layer of tissue.

FIG. 2C is a side view similar to FIG. 2B, but showing the distal portion fully compressed and engaged against the layer of tissue.

FIG. 2D is a side view similar to FIG. 2C but illustrating the proximal portion of the tissue anchor being moved toward the layer of tissue.

FIG. 2E illustrates the proximal and distal portions of the tissue anchor fully compressed against opposite sides of the layer of tissue.

FIG. 2F is an enlarged cross sectional view illustrating the fully deployed and fastened anchor with a layer of tissue between proximal and distal anchor portions.

FIG. 3 is a side cross sectional view similar to FIG. 2F, but illustrating the fastening of two layers of tissue between the proximal and distal anchor portions.

FIGS. 4A-4F are perspective views illustrating successive steps in an annuloplasty procedure on the mitral valve of a patient utilizing tissue anchors of the first embodiment.

FIGS. 5A-5E are perspective views illustrating a mitral valve annuloplasty procedure utilizing tissue anchors constructed according to a second embodiment of the invention.

FIG. 6 is a side elevational view illustrating the tissue anchor constructed in accordance with the second embodiment.

FIG. 7 is a front view of the elongate strip portion of the  $^{\rm 35}$   $\,$  anchor.

FIG. 7A is a front elevational view similar to FIG. 7, but illustrating one embodiment of radiopaque markers used on the elongate strip.

FIG. 7B is a front elevational view of an alternative anchor strip having a varying width along its length.

FIG. 7C is a side elevational view of another alternative anchor strip utilizing more rigid fold sections separated by living hinges.

FIGS. **8**A-**8**D are respective side views illustrating a sequence of steps used for securing the tissue anchor of the second embodiment to a layer of tissue.

FIG. **8**E is a view similar to FIG. **8**D, but illustrating an alternative tip and tensioning member arrangement.

FIGS. 9A-9C are respective side elevational views illustrating an annuloplasty procedure in which two tissue anchors of the second embodiment are daisy-chained together with a single tensioning member to plicate the tissue between the anchors in a more integrated procedure.

FIGS. 10A and 10B are respective side elevational views illustrating the tissue anchor of the second embodiment used to provide an anchor or securement location on only one side of a tissue layer.

## DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

Referring first to FIG. 1, a tissue anchor 10 constructed in accordance with a first embodiment of the invention generally includes a tensioning member 12, such as a suture, extending through spaced apart points along a flat elongate strip 14 of flexible material, such as a surgical grade fabric. It will be appreciated that the tensioning member 12 may take other

forms other than suture material, such as cable or any other small diameter member having a high enough tensile strength for the intended anchoring use. The elongate strip 14 may also take various forms such as woven or nonwoven fabrics, polymers, metals or other suitable materials or combinations of 5 materials. One or more separate pledgets or other securement members (not shown) may be used in conjunction with the elongate strip 14 for added securement and/or concealing the elongate strip 14 and, for example, thereby inhibiting blood clotting within or adjacent to the folds that will be formed in 10 the strip 14.

5

A woven or nonwoven material may contain additional materials, such as threads, beads or other elements that cause at least portions of the strip 14 to be radiopaque. Currently, a surgical grade fabric constructed from polyester, such as 15 Dacron®, is contemplated for use in constructing the strip 14. One of many possible alternative materials for use in constructing strip 14 is polytetrafluoroethylene (PTFE). Tissue anchor 10 may be partly or wholly formed from materials that are absorbed into the patient's tissue over time, depending on 20 the intended use. The edges and/or other portions of the strip 14 may be suitably modified to prevent fraying, such as by being coated with a material that locks the fibers in place, or otherwise modified in a manner that locks the fibers at least at the edges of the strip 14 in place.

The suture 12 may extend from a proximal end portion 14a of the fabric strip **14** to a distal end portion **14***b* and then loop back through spaced apart points of the fabric strip 14 to the proximal end portion 14a where a knot 16 or other stop member is located for reasons to be described below. As will 30 become apparent, the suture 12 extends through spaced apart locations along the elongate strip 14 such that tensioning of the suture 12 or other tensioning member will cause the elongate strip 14 to form folded portions 14c when the tensioning member 12 is placed under tension or pulled. Thus, 35 the elongate strip 14 is activated in this manner between essentially an elongate deployment orientation or configuration, such as shown in FIG. 1, and a shortened configuration, such as a folded or otherwise shortened configuration having an expanded width in at least one dimension as compared to 40 the elongate deployment configuration. It will be appreciated that the deployment orientation may take on various forms due to the flexible nature of the strip 14, especially when using a highly flexible fabric or other material. For example, a fabric material or other similarly flexible materials may be folded or 45 otherwise deformed for carrying purposes within a catheter and/or during deployment to a tissue site and then suitably activated at the tissue site.

More specifically referring to FIGS. 2A-2E, the elongate strip 14 and attached suture 12 are initially inserted through at 50 least one tissue layer 20 as generally shown in FIG. 2A. One end or portion 12a of the suture 12 is then pulled and thereby placed under tension. It will be appreciated that, for catheterbased procedures, suture portion 12a may extend to a location outside the patient's body for pulling or tensioning, or it may 55 be grasped by a suitable mechanism within the catheter and pulled or tensioned. Pulling suture portion 12a may initially draw the distal portion 14b of the elongate strip 14 toward the layer of tissue 20 as shown in FIG. 2B. Once the distal portion 14b is compressed against the layer of tissue 20, the proximal 60 portion 14a begins to be drawn and compressed against a proximal side of the tissue 20 as shown in FIGS. 2C-2E. This occurs because end 12a of the suture 12 is being pulled downwardly (as viewed for purposes of discussion in FIGS. 2C-2E) and, since the suture 12 is looped in a reverse direc- 65 tion through distal end portion 14b of the elongate strip 14, the knot 16 at the end of the suture 12 moves upwardly and brings

6

the proximal portion 14a of the elongate strip 14 with it. In this manner, the proximal portion 14a of the elongate strip 14 is being folded and drawn along the suture 12 toward the layer of tissue 20 and then firmly compressed against the proximal side of the layer of tissue 20 as shown in FIG. 2E. As further shown in FIG. 2F, a suitable locker element, such as a crimp member 22, a knot or other element may be used to maintain the suture 12 and elongate strip 14 in the positions shown in FIG. 2F securely anchoring the proximal and distal portions 14a, 14b of the elongate strip 14 folded against opposite sides of the tissue 20.

As further shown in FIG. 3, the same general procedure may be used to secure two distinct tissue layers 30, 32 together by initialing extending the elongate strip 14 and tensioning member 12 through at least two layers of tissue 30, 32. In this manner, for example, two layers of tissue 30, 32 may be securely fastened together. This may, for example, involve two entirely different layers and even types of tissue or the same layer of tissue which has been folded over to effectively form two layers (i.e., portions) of tissue.

FIGS. 4A-4E schematically illustrate an annuloplasty procedure performed on a mitral valve 40 of a heart 42 utilizing tissue anchors 10 as described above in regard to the first embodiment. Performance of the annuloplasty procedure may have many variations, but is generally illustrated by the placement of at least two tissue anchors 10 and securement of the two anchors 10 together, such as with one or more tensioning members 12 therebetween. For an additional illustrative description of catheter-based annuloplasty procedures that may utilize any of the tissue anchors within the scope of the present invention, reference may be made to U.S. patent application Ser. No. 10/948,922, filed on Sep. 24, 2004, assigned to the assignee of the present invention, and the disclosure of which is hereby entirely incorporated by reference herein.

As illustrated in FIG. 4A, a first tissue anchor 10 is deployed through a catheter device 50 which may, for example, have an inner tubular member 52 or deploying catheter received within an outer tubular member 54 or delivery catheter. The tissue anchor 10 and tensioning member 12 are carried within the inner tubular member 52 and are deployed from a distal end 52a thereof. To ensure that proper force is applied to penetrate the tissue, tissue anchor 10 may be deployed or extended after the inner tubular member 52 has been inserted through tissue at the annulus 40a of the mitral valve 40. This is best illustrated in FIG. 4B. The inner tubular member 52 is withdrawn from the annulus tissue 40a either before, during or after activation of the distal end portion 14b of the elongate strip 14. As previously described, activating (e.g., compression, folding or otherwise shortening) the elongate strip 14 by pulling the suture 12 causes the distal end portion 14b and then proximal end portion 14a to be securely compressed and folded against opposite sides of the annulus tissue 40a. This procedure is repeated at least one additional time to securely fasten an additional tissue anchor 10 at a location spaced from the initial location. For example, the initial location may be at location P2 of the mitral valve annulus 40 while the second location may be spaced on either side of location P2. Catheter device 50 may be inserted into the location of annulus 40a in various manners, but is shown being inserted downwardly through the aortic valve 53 into the left ventricle 55, and curving upward toward the mitral valve annulus 40a.

In the illustrative example shown in FIG. 4E, three tissue anchors 10 have been deployed and securely fastened to the annulus tissue 40a. As shown in FIG. 4F a suture locker 56 may then be deployed and used to maintain relative position

and, therefore, tension between each of three respective tensioning members or sutures 12 associated with the three tissue anchors 10 after the tissue anchors 10 have been pulled closer to each other thereby plicating the tissue 40a between the anchors 10. This essentially shortens the valve annulus 5 40a and pulls the posterior leaflet 60 toward the anterior leaflet 62 to prevent leakage through the valve 40, i.e., to achieve better coaptation of the posterior and anterior leaflets 60, 62 during systole.

FIGS. 5A-5E illustrate a similar annuloplasty procedure on 10 a mitral valve 40 utilizing a second embodiment of a tissue anchor 70 and a modified method of deployment and activation. In general, the differences between anchor 70 and anchor 10 will be described below with the understanding that all other attributes, options and features associated with 15 anchor 70 may be as described above in connection with anchor 10. As shown in FIG. 5A, in this embodiment a tensioning member 72 is again used to activate a flexible, elongate flat strip 74 having proximal and distal end portions 74a, 74b. Strip 74 includes a tip 76 that is formed or otherwise 20 secured on the distal end portion 74b. The tensioning member 72 and the tip 76 are arranged such that the tensioning member 72 slides relative to the tip 76. More particularly, the tensioning member 72 can be threaded through the tip 76. Tip portions of strip 74 and of smaller diameter than the width of strip 74. Therefore, tip 76 helps to penetrate the annulus tissue 40a as the inner tubular member 52 and the elongate strip 74 are extended through the tissue 40a. A wire 73 may be used to push the tip 76 out of the tubular member 52 at the desired 30 time. The tip 76 may protrude slightly from the inner tubular member 52 as the tissue 40a is penetrated to assist with piercing the tissue 40a. The tip 76 may also assist with forcing distal portion or half 74b of strip 74 into a folded or otherwise shortened configuration. To help prevent the distal portion 35 **74**b of the elongate strip from pulling back through the tissue 40a as the inner tubular member 52 is withdrawn from the annulus tissue 40a, the free end of the tensioning member 72 is pulled while the inner tubular member 52 is still penetrated through the tissue **40***a* and into the left atrium **80** from the left 40 ventricle 55. This forms the distal portion 74b into a folded or otherwise shortened configuration as shown in FIG. 5B. The inner tubular member 52 may then be withdrawn without also withdrawing the elongate flexible strip 74 with it, as shown in FIG. 5C. The proximal portion 74a of the elongate strip 74 is 45 then deployed by pulling the inner tubular member 52 further in a proximal direction, and thereby exposing the full length of strip 74. The tensioning member 72 is pulled or tensioned so as to draw and compress the proximal portion 74a of the elongate strip 74 into a folded, shortened condition against an 50 underside of the annulus tissue 40a as shown in FIG. 5D. As with the previously described annuloplasty procedure using the first embodiment of the tissue anchor 10, this is repeated as many times as necessary to create the necessary number of tissue plications. FIG. 5E illustrates this by way of an exem- 55 plary view of three successive tissue anchor securement locations with tissue anchors 70 that may be drawn together and locked in place to achieve and retain the plications as described in connection with FIG. 4F. Such plications reduce or close the gap between the posterior and anterior leaflets 60, 60 62. during systole

FIG. 6 is a side elevational view of the tissue anchor 70 as shown and described with respect to the annuloplasty procedure of FIGS. 5A-5E. This embodiment differs from the first embodiment in a number of different manners, in addition to 65 the use of a distal tip 76 for tissue penetration purposes. For example, the elongate strip 74 is somewhat shorter than the

elongate strip 14 utilized in the first embodiment. For example, the strip 74 may be about 40 mm long by about 3 mm wide. Of course, any other desired dimensions and shapes may be used depending on application needs. This may be desirable to achieve a lower profile deployed and fastened configuration with fewer folds that may lead to more versatile applications, lower incidents of blood clotting, easier use, etc. In addition, respective proximal and distal radiopaque bands 90, 92 are secured to the suture 72 at the proximal end portion of the strip 74 and to either the interior or exterior of the distal tip 76. Under a fluoroscope, these bands or other markers 90, 92 will indicate to the surgeon that the anchor 70 has been deployed, activated and fully compressed and/or fastened as necessary during the procedure. The tip 76 itself may alternatively be formed from a radiopaque material. In this second embodiment, the knot 94 formed in the suture 72 or other tensioning member is a slip knot through which another portion of the suture 72 slides during activation of the tissue anchor 70. It will be appreciated that this slip knot 94 may be replaced by another element which serves essentially the same purpose but takes the form, for example, of a small tubular element or other feature similar in function to a slip knot.

As further shown in FIGS. 6 and 7, the tensioning member 76 is made to be relatively rigid as compared to other flexible 25 or suture 72 can advantageously extend through respective fold portions 74c of the elongate strip 74 in essentially an hourglass configuration. Specifically, adjacent portions of the suture 72 located near the proximal and distal end portions 74a, 74b of the strip 74 are spaced farther apart than the adjacent portions of the suture 72 in the middle of the strip 74. As further shown in FIG. 7A, radiopaque markers, such as distinct areas of dots 95, may be used for enabling the surgeon to visualize the folds of the elongate strip 74 during deployment and securement of the elongate strip 74. These dots or other radiopaque markers may be printed on the strip 74. For example, dots 95 or other markers may be formed with a platinum powder base ink or other suitable material that is radiopaque and biologically compatible. This radiopaque material may also add stiffness to the fold sections 74c thereby helping to maintain the fold sections 74c flat and increasing retention force on the tissue. Meanwhile, the fold lines 74d between fold sections 74c can remain highly flexible to create tight radius fold lines. As further shown in FIG. 7, each of the holes 96 that the tensioning member or suture 72 is received through may be marked by circles 98 surrounding each hole 96 or other markers for visualizing purposes during assembly of the tensioning member or suture 72 with the elongate strip 74. Optionally, holes 96 may be eliminated and the suture 72 may be threaded with a needle through the strip 74. One could also, for example, choose different sets of holes 96 along strip 74 for receiving the tensioning member or suture 72 thereby changing the width of the folds and/or number of folds and/or shape of the folds depending on the application needs or desires of the surgeon. The tensioning member or suture 72 may be threaded or otherwise attached along the strip 74 in any number of manners including, for example, x-patterns or other crossing patterns, zig-zag patterns, etc. that may alter the folded or otherwise shortened or compressed footprint of the anchor into various beneficial shapes, such as flower shapes, circular shapes or other rounded shapes, ball shapes or other configurations. Modifications of the manner in which the tensioning member or suture 72 is threaded or otherwise attached along the length of strip 74 may result in higher or lower tensioning force being required to compress the anchor and/or higher or lower friction holding force that may help maintain the anchor in the compressed or shortened configuration. The width of the

elongate strip 74' may be varied along its length, such as by tapering, stepping, or forming an hourglass shape or shapes along the length of the strip 14. For example, as illustrated in FIG. 7B, having proximal and distal end portions 75, 77 of wider dimension than an intermediate or middle portion or 5 portions 79 along the length of strip 74' will allow these wider portions 75, 77 may cover over the more intermediate folded portions 79 and prevent unnecessary contact with adjacent tissue during use. It will be appreciated that like reference numerals are used herein to refer to like elements in all embodiments and reference numerals with prime marks (') or double prime marks (") refer to like elements that have been modified in a manner as described herein or otherwise shown in the associated figure. Strip 74 may have variable stiffness including, for example, a relatively rigid perimeter or rela- 15 tively rigid edges 74e, 74f (FIG. 7) or intermittent relatively rigid sections 74c" separated by flexible sections such as living hinges 74d" (FIG. 7C) that may aid in folding and securing the elongate strip 74" into a folded condition.

FIGS. 8A-8D illustrate a series of steps for deploying and 20 securely fastening the tissue anchor 70 of the second embodiment to a layer of tissue 100. Generally, as shown in FIG. 8A, the combination of the elongate strip 74 and tensioning member or suture 72 is deployed through the layer of tissue 100. One end or portion 72a of the suture 72 that extends through 25 the slip knot 94 is then pulled. This causes the distal portion 74b of the elongate strip 74 to fold and compress against the distal side of the tissue layer 100. As shown in FIG. 8B, further pulling of the tensioning member 72 causes the slip knot **94** to ride upwardly or distally along the suture **72** and against a proximal portion 74a of the elongate strip 74 thereby folding and compressing the proximal portion 74a against the proximal side of the tissue layer 100 as shown in FIG. 8C. As shown in FIG. 8D, a suitable crimp or locking element 102 may be used to securely lock the slip knot 94 in place relative 35 needs and preferences of the user. What is claimed is: to the suture or tensioning member segment which extends therethrough. This will lock the entire anchor 70 in place with the respective proximal and distal folded strip portions 74a, 74b securely retaining the tissue layer or layers 100 therebetween. FIG. 8D shows the tip 76 acting as a retainer on top of 40 the distal end portion 74b to assist in holding the distal end portion 74b in place. FIG. 8E shows an alternative in which the tensioning member is threaded through at least one hole **76***a* more centrally located in the tip. Yet another alternative would be to thread the tensioning member through two cen- 45 trally located holes instead of through the proximal end of the tip 76 and one centrally located hole 76a as shown in FIG. 8E. These alternatives allow the tip 76 to act more like a "T"-bar with forces acting in a more perpendicular or normal manner relative to the distal end portion 74b of the strip 74.

FIGS. 9A-9C illustrate another alternative embodiment of a plication procedure, for example, for use during annuloplasty on a mitral valve annulus 40a. In this regard, a single tensioning member, such as a suture 103 or other member may be used to deploy, fasten and draw together at least two 55 separate tissue anchors 110. As shown in FIG. 9A, first and second tissue anchors 110 may be respectively deployed at spaced apart locations along the mitral valve annulus 40a. Each tissue anchor 110 includes an elongate strip 114 of flexible material, such as fabric or other material as described 60 above, as well as a single suture 103 or tensioning member extending through each of the elongate strips 114. Upon deployment of the two tissue anchors 110 through the tissue layer 40 at spaced apart locations, the free end of the suture 103 or tensioning member is pulled thereby securely fastening the first tissue anchor 110 as shown in FIGS. 9A and 9B and subsequently securely fastening the second tissue anchor

10

110 to the annulus tissue 40a. Upon further pulling or tensioning of the suture 103, the tissue anchors 110 will be drawn together to plicate the tissue 40 therebetween as shown in FIG. 9C. A crimp or other locker member 116 may then be used to lock in the desired amount of plication by crimping onto the free end of the suture 103 adjacent to the slip knot 94 of the first tissue anchor 110 as shown in FIG. 9C. The free end of the suture 103 may then be cut to eliminate or reduce the length of the suture tail.

FIGS. 10A and 10B illustrate a tissue anchor 70 of the second embodiment, for example, being used to provide an anchor or securement location on only one side of a tissue layer 120. In this regard, the tissue anchor 70 may be extended entirely through the tissue layer(s) 120. The free end of the suture or tensioning member 72 is then pulled proximally to compress and fold the elongate strip 74 against the distal side of the tissue layer 120 as shown in FIG. 10B. It will be appreciated that activation of strip 74 occurs similarly to the other described embodiments, except that the activated portion (that is, the folded or otherwise shortened portion) is located entirely on one side of the tissue layer 120. As illustrated, the intermediate or middle portion between the proximal and distal end portions of the anchor member shortens to adjust to the amount of tissue contained therebetween (if any) or shortens during the compression process on only one side of the tissue.

While the present invention has been illustrated by a description of various illustrative embodiments and while these embodiments have been described in some detail, it is not the intention of the Applicant to restrict or in any way limit the scope of the appended claims to such detail. Additional advantages and modifications will readily appear to those skilled in the art. The various features of the invention may be used alone or in numerous combinations depending on the

What is claimed is:

- 1. A tissue anchor comprising:
- a generally flexible elongate continuous anchor member capable of being inserted through tissue and moving between an elongate configuration and a shortened configuration suitable for anchoring against at least one side of the tissue, said anchor member having a proximal end portion, a distal end portion, and a compressible intermediate portion between said proximal end portion and said distal end portion, and
- a tensioning member operatively connected to said anchor member such that said anchor member can slide relative to said tensioning member, the tensioning member extending through the proximal end portion of the generally flexible elongate anchor member, to the distal end portion, and back to an anchor point at the proximal end portion, at least first and second generally parallel portions of the tensioning member and at least a portion of the intermediate portion of the generally flexible elongate anchor member extending through the tissue in a deployed configuration, said tensioning member capable of being pulled to cause said anchor member to move relative to said tensioning member from said elongate configuration to said shortened configuration wherein the compressible intermediate portion can compress and thereby adjust to the thickness of the tissue between the proximal and distal end portions and said anchor member forms at least one fold upon pulling said tensioning member; wherein material of the anchor member is selected to fold on both proximal and distal sides of the tissue in response to a transition to the shortened configuration.

- 2. The tissue anchor of claim 1, wherein said generally flexible elongate anchor member is formed from a material selected from at least one of: natural fibers, synthetic fibers, polymers, and metals.
- 3. The tissue anchor of claim 2, wherein said tensioning 5 member comprises a suture.
- **4**. The tissue anchor of claim **1**, wherein said tensioning member comprises a suture.
- 5. The tissue anchor of claim 1, wherein said tensioning member includes a stop member engageable with said anchor 10 member.
- 6. The tissue anchor of claim 5, wherein said stop member comprises a knot in said tensioning member.
- 7. The tissue anchor of claim 1, wherein said tensioning member extends through said anchor member at multiple 15 locations between the proximal end portion and the distal end portion.
- **8**. The tissue anchor of claim **1**, further comprising a lock member engageable with said tensioning member to retain said anchor member in the shortened configuration.
- 9. The tissue anchor of claim 1, further comprising at least one radiopaque marker on at least one of said anchor member and said tensioning member.
- 10. The tissue anchor of claim 9, further comprising a first radiopaque marker located proximate said proximal end portion when said anchor member is in the shortened configuration and a second radiopaque marker located proximate said distal end portion when said anchor member is in the shortened configuration.
- 11. The tissue anchor of claim 1, wherein said distal end 30 portion includes a relatively rigid tip, said tip being of reduced width relative to an adjacent portion of said anchor member.
- 12. The tissue anchor of claim 11, wherein said tip acts as a compressive force applying member against the distal end portion of the anchor member when the anchor member is in 35 the shortened configuration.
- 13. The tissue anchor of claim 1, wherein said anchor member varies in width along its length when in the elongate configuration, wherein the proximal and distal end portions of the anchor member have greater width than the intermediate 40 portion to allow the proximal and distal end portions to cover a plurality of folded sections formed in the intermediate portion in the shortened configuration.
- **14**. The tissue anchor of claim **1**, wherein said anchor member includes an edge portion that extends longitudinally 45 along a side edge of the anchor member and is more rigid than a central area of said anchor member.
- **15**. The tissue anchor of claim 1, further comprising: a force applying member configured to bear against the distal end portion of the anchor member when the anchor member 50 is in the shortened configuration.
  - 16. A tissue anchor comprising:
  - a flat, generally flexible elongate continuous anchor member capable of movement between an elongate configuration suitable for deployment and a shortened configuration suitable for anchoring against tissue, said anchor member having a proximal end portion, a distal end portion, and a compressible intermediate portion between said proximal end portion and said distal end portion, wherein said anchor member includes a plurality of fold lines that are spaced along a length of said anchor member and extend transversely across said anchor member, said fold lines defining discrete sections of the anchor member which lie in a stacked orientation in said shortened configuration; and
  - a tensioning member operatively connected to said anchor member such that said anchor member can slide relative

12

to said tensioning member, the tensioning member extending through the proximal end portion of the flat, generally flexible elongate member, to the distal end portion, and back to an anchor point at the proximal end portion, at least first and second generally parallel portions of the tensioning member and at least a portion of the intermediate portion of the anchor member extending through the tissue in a deployed configuration, said tensioning member capable of being pulled to cause said anchor member to move relative to said tensioning member from said elongate configuration to said shortened configuration and said anchor member forms at least one fold upon pulling of said tensioning member; wherein material of the anchor member is selected to fold on both proximal and distal sides of the tissue in response to a transition to the shortened configuration.

- 17. The tissue anchor of claim 16, further comprising: a force applying member configured to bear against the anchor member when the anchor member is in the shortened configuration.
  - 18. The tissue anchor of claim 16, wherein the plurality of fold lines comprises a plurality of living-hinges formed in the anchor member.
    - 19. A tissue anchor comprising:
    - a flat elongate continuous anchor member formed from a strip of fabric material and capable of movement between an elongate configuration suitable for deployment and a shortened configuration suitable for anchoring against tissue, said anchor member having a proximal end portion, a distal end portion, and a compressible intermediate portion between said proximal end portion and said distal end portion,
    - a tensioning member operatively connected to said anchor member such that said anchor member can slide relative to said tensioning member, the tensioning member extending through the proximal end portion of the flat elongate anchor member, to the distal end portion, and back to an anchor point at the proximal end portion, at least first and second generally parallel portions of the tensioning member and at least a portion of the intermediate portion of the anchor member extending through the tissue in a deployed configuration, said tensioning member capable of being pulled to cause said anchor member to move relative to said tensioning member from said elongate configuration to said shortened configuration and said anchor member forms at least one fold upon pulling said tensioning member, and
    - a lock member capable of securing the anchor member in the shortened configuration; wherein material of the anchor member is selected to fold on both proximal and distal sides of the tissue in response to a transition to the shortened configuration.
    - 20. A tissue anchor comprising:
    - a flat, generally flexible elongate continuous anchor member capable of being inserted through tissue and moving between an elongate configuration suitable for deployment through a catheter and a shortened configuration suitable for anchoring against the tissue, said anchor member having a proximal end portion, a distal end portion, and a compressible intermediate portion between said proximal end portion and said distal end portion, and
    - a tensioning member operatively connected to said anchor member such that said anchor member can slide relative to said tensioning member, the tensioning member extending through the proximal end portion of the flat, generally flexible elongate anchor member, to the distal

end portion, and back to an anchor point at the proximal end portion, at least first and second generally parallel portions of the tensioning member and at least a portion of the intermediate portion of the anchor member extending through the tissue in a deployed configuration, said tensioning member capable of being pulled to cause said anchor member to move relative to said tensioning member from said elongate configuration to said shortened configuration against the tissue and said anchor member forms at least one fold upon pulling said tensioning member;

- wherein the anchor member includes a plurality of holes through which the tensioning member passes to allow the tensioning member to be routed in a longitudinal direction in both a first direction and in an opposite 15 second direction along the anchor member, wherein the holes are formed linearly along only a single axis; wherein material of the anchor member is selected to fold on both proximal and distal sides of the tissue in response to a transition to the shortened configuration. 20
- 21. The tissue anchor of claim 20, further comprising: a force applying member configured to bear against the anchor member when the anchor member is in the shortened configuration.
  - 22. A tissue anchor comprising:
  - a flat elongate continuous strip formed from a generally flexible material and having proximal and distal end portions, and a compressible intermediate portion between said proximal end portion and said distal end portion, and
  - a tensioning member having first and second ends, the tensioning member extending through the proximal end portion of the flat elongate strip, to the distal end portion, and back to an anchor point at the proximal end portion, at least first and second generally parallel portions of the 35 tensioning member and at least a portion of the intermediate portion of the strip extending through the tissue in a deployed configuration, said tensioning member operatively connected to said elongate strip such that pulling on said first end of said tensioning member 40 causes said proximal and distal end portions of said elongate strip to move toward each other into a shortened configuration suitable for anchoring against the tissue and said elongate strip forms at least one fold upon pulling said tensioning member; wherein material of the 45 anchor member is selected to fold on both proximal and distal sides of the tissue in response to a transition to the shortened configuration.
- 23. The tissue anchor of claim 22, further comprising: a force applying member configured to bear against the distal 50 end portion of the anchor member when the anchor member is in the shortened configuration.
  - 24. A tissue anchor comprising:
  - a generally flexible flat elongate continuous anchor strip capable of being inserted through tissue in an elongate 55 configuration and movable to a shortened, folded configuration suitable for anchoring against at least one side of the tissue, anchor strip having a proximal end portion, a distal end portion, and a compressible intermediate portion between said proximal end portion and said distal end portion, and
  - an activation member operatively connected to said anchor strip, the activation member extending through the proximal end portion of the generally flexible flat elongate continuous anchor strip, to the distal end portion, and back to an anchor point at the proximal end portion, at least first and second generally parallel portions of the

14

tensioning member and at least a portion of the intermediate portion of the anchor strip extending through the tissue in a deployed configuration, and operable to move the anchor strip from the elongate configuration to the shortened, folded configuration; wherein material of the anchor member is selected to fold on both proximal and distal sides of the tissue in response to a transition to the shortened, folded configuration.

- 25. The tissue anchor of claim 24, wherein the shortened, folded configuration further comprises a zig-zag fold pattern.
- **26**. The tissue anchor of claim **24**, further comprising: a force applying member configured to bear against the anchor strip when the anchor strip is in the shortened, folded configuration.
  - **27**. A tissue anchoring system, comprising: a delivery catheter.
  - a generally flexible elongate continuous anchor member capable of being inserted through tissue and moving between an elongate configuration and a shortened configuration suitable for anchoring against at least one side of the tissue, said anchor member having a proximal end portion, a distal end portion, and a compressible intermediate portion between said proximal end portion and said distal end portion, and a deploying device operatively associated with said delivery catheter and operable to extend the anchor member from said delivery catheter, and
  - a tensioning member operatively connected to said anchor member such that said anchor member can slide relative to said tensioning member, the tensioning member extending through the proximal end portion of the generally flexible elongate anchor member, to the distal end portion, and back to an anchor point at the proximal end portion, at least first and second generally parallel portions of the tensioning member and at least a portion of the intermediate portion of the generally flexible elongate anchor member extending through the tissue in a deployed configuration, said tensioning member capable of being pulled to cause said anchor member to move relative to said tensioning member from said elongate configuration to said shortened configuration wherein the compressible intermediate portion can compress and thereby adjust to the thickness of the layer of tissue between the proximal and distal end portions and said anchor member forms at least one fold upon pulling said tensioning member:
  - wherein said anchor member includes a plurality of fold lines that are spaced along a length of said anchor member and extend transversely across said anchor member, said fold lines defining discrete sections of the anchor member which lie in a stacked orientation in said shortened configuration; wherein material of the anchor member is selected to fold on both proximal and distal sides of the tissue in response to a transition to the shortened configuration.
- 28. The system of claim 27, wherein said deploying device further comprises a deploying catheter at least partially containing said anchor member and at least partially contained within said delivery catheter.
- **29**. The system of claim **27**, wherein said anchor member is formed from a material selected from at least one of: natural fibers, synthetic fibers, polymers, and metals.
- **30**. The system of claim **29**, wherein said tensioning member comprises a suture.
- 31. The system of claim 27, wherein said tensioning member comprises a suture.

- **32**. The system of claim **27**, wherein said tensioning member includes a stop member engageable with said anchor member.
- **33**. The system of claim **32**, wherein said stop member comprises a knot in said tensioning member.
- 34. The system of claim 27, wherein said tensioning member extends through said anchor member at multiple locations between the proximal end portion and the distal end portion.
- **35**. The system of claim **27**, further comprising a lock member engageable with said tensioning member to retain 10 said anchor member in the shortened configuration.
- **36**. The system of claim **27**, further comprising at least one radiopaque marker on at least one of said anchor member and said tensioning member.
- **37**. The system of claim **36**, further comprising a first 15 radiopaque marker located proximate said proximal end portion when said anchor member is in the shortened configuration and a second radiopaque marker located proximate said distal end portion when said anchor member is in the shortened configuration.
- **38**. The system of claim **27**, wherein said distal end portion includes a relatively rigid tip, said tip being of reduced width relative to an adjacent portion of said anchor member.
- **39**. The system of claim **38**, wherein said tip acts as a compressive force applying member against the distal end portion of the anchor member when the anchor member is in the shortened configuration.
- **40**. The system of claim **27**, wherein said anchor member varies in width along its length when in the elongate configuration.
- **41**. The system of claim **27**, wherein said anchor member includes an edge portion that is more rigid than a central area of said anchor member.
- **42**. The tissue anchoring system of claim **27**, further comprising: a force applying member configured to bear against 35 the distal end portion of the anchor member when the anchor member is in the shortened configuration.
  - 43. A tissue anchoring system, comprising:
  - a first generally flexible continuous anchor member capable of being inserted through tissue and moving 40 between an elongate configuration and a shortened configuration suitable for anchoring against at least one side of the tissue, said anchor member having a proximal end portion, a distal end portion, and a compressible intermediate portion between said proximal end portion and 45 said distal end portion,
  - a second generally flexible continuous anchor member capable of being inserted through the tissue and moving between an elongate configuration and a shortened configuration suitable for anchoring against at least one side 50 of the tissue, said second anchor member having a proximal end portion, a distal end portion, and a compressible intermediate portion between said proximal end portion and said distal end portion, and
  - a coupling structure operatively connecting said first and 55 second anchor members, the coupling structure comprising at least one tensioning member operatively connected to said first and second anchor members, the tensioning member extending through the proximal end portion of the first anchor member and travels in a first 60 direction, to the distal end portion, and then extends in an opposite second direction back to the proximal end portion of the first anchor member and then extends through the proximal end portion of the second anchor member and travels in the first direction to the distal end portion of the second anchor member and then extends in the opposite second direction back to the proximal end por-

16

tion of the second anchor member, at least first and second portions of the tensioning member and at least a portion of the intermediate portion of the at least one of the first and second anchor members extending through the tissue in a deployed configuration, said tensioning member capable of being pulled to cause the least one of said first and second anchor members to move relative to said tensioning member from said elongate configuration to said shortened configuration wherein the compressible intermediate portion can compress and thereby adjust to the thickness of the layer of tissue between the proximal and distal end portions and the least one of said first and second anchor members forms at least one fold upon pulling said tensioning member; wherein material of the anchor member is selected to fold on both proximal and distal sides of the tissue in response to a transition to the shortened configuration.

- **44**. The system of claim **43**, wherein said tensioning mem-20 ber comprises a suture.
  - 45. The system of claim 43, further comprising:
  - a lock member engageable with said at least one tensioning member to retain said first and second anchor members in their respective shortened configurations.
  - 46. The system of claim 43, further comprising:
  - a delivery catheter, and
  - a deploying device operatively associated with said delivery catheter and operable to extend at least one of the first and second anchor members from said delivery catheter.
  - 47. The system of claim 46, wherein said deploying device comprises a deploying catheter at least partially containing said anchor member and at least partially contained within said delivery catheter.
  - **48**. The system of claim **43**, wherein said anchor member is formed from a material selected from at least one of: natural fibers, synthetic fibers, polymers, and metals.
  - **49**. The system of claim **43**, further comprising a stop member engageable with said anchor member.
  - **50**. The system of claim **43**, wherein said first and second anchor members are configured such that said first and second anchor member each can form at least one fold in said compressible intermediate portion.
  - 51. The system of claim 43, further comprising at least one radiopaque marker on at least one of said first anchor member, said second anchor member, or said coupling structure.
  - **52**. The system of claim **43**, wherein said distal end portions of said first and second anchor members each includes a relatively rigid tip, said tips being of reduced widths relative to adjacent portions of said first and second anchor members.
  - **53**. The system of claim **52**, wherein said tips act as compressive force applying members against the distal end portions of the respective first and second anchor members when the first and second anchor members are in their shortened configurations.
  - **54.** The tissue anchoring system of claim **43** further comprising:
    - a first force applying member configured to bear against the distal end portion of the first anchor member when the first anchor member is in the shortened configuration, and
  - a second force applying member configured to bear against the distal end portion of the second anchor member when the second anchor member is in the shortened configuration.
  - **55.** The system of claim **43**, wherein the first and second anchors are disposed side-by-side in spaced relationship.

- **56**. The system of claim **43**, wherein the distal end portions of each of the first and second anchors are disposed on one side of the tissue and the proximal end portions of the first and second anchors are disposed on an opposite side of the tissue.
- **57**. A tissue anchor capable of being inserted through tissue of the anchoring on both a proximal side and a distal side of the tissue, comprising:
  - a generally flexible elongate continuous anchor member having a proximal end portion, a distal end portion, and an intermediate portion, the anchor member being comprising a material capable of transitioning between an elongate configuration and a shortened configuration,
  - wherein in the shortened configuration the anchor member defines a plurality of folds, the anchor member having a length sufficient to define at least one fold on each of the proximal side and the distal side of the tissue with at least a portion of the intermediate portion extending through the tissue in a deployed condition; and
  - a tensioning member operatively connected to the anchor member such that the anchor member slides relative to said tensioning member under an external force, the tensioning member extending through the proximal end

18

- portion of the generally flexible elongate anchor member, to the distal end portion, and back to an anchor point at the proximal end portion,
- wherein the tensioning member is pullable to cause the anchor member to move relative to said tensioning member to transition the anchor member from the elongate configuration to the shortened configuration,
- wherein the material of the anchor member is selected to fold on both the proximal and distal sides of the tissue in response to the transition to the shortened configuration, and
- wherein at least first and second generally parallel portions of the tensioning member extend through the tissue adjacent one folded section of the intermediate portion and extend in a longitudinal direction along one side of the intermediate portion, wherein the one folded section has a first end portion that lies along the proximal side of the tissue and a second end portion that lies along the distal side of the tissue and passes through the tissue at a location between the first and second end portions of the one folded section.

\* \* \* \* \*